



Cable : SR35 & Equivalents

Pin, solder with positive lock

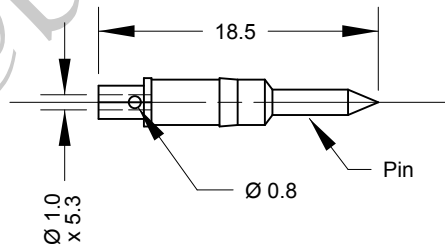

Note. Pin will snap into barrel with a positive lock.

Cable Preparation

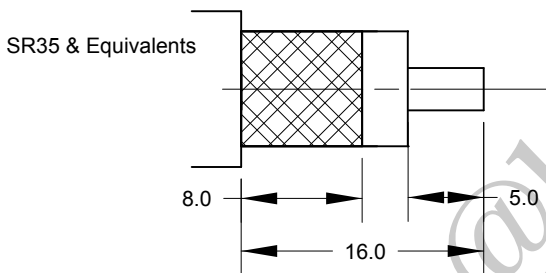

Note.
Crimping Details

Crimp Ferrule Hex 0.213" (5.40mm)
Crimp Tool Order Code:-
180455, 180456 or 180458

Cable Construction Specifications

| | |
|-----------------|--------|
| | SR35 |
| Inner Conductor | mm |
| Dielectric | mm |
| Overall Braid | mm |
| Jacket | 3.50mm |

| | PART | DESCRIPTION |
|---|-------------|----------------------|
| 1 | Shell/Body | Brass, CuSnZn Plated |
| 2 | Insulator | Teflon |
| 3 | Pin Contact | Brass, Gold Plated |
| 4 | Ferrule | Brass, Nickel Plated |

BARENCO Ltd

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

DRAWN Name B. Gell

Dimensions: mm

Date 10/07/2020

Last Rev.

SCALE 1 : 0.5

N plug crimp
for SR35

SIZE
A4

DWG NUMBER
170010P

REV -

SHEET 1 OF 1