



Cable : RG213 & Equivalents

Pin, solder / crimp with positive lock

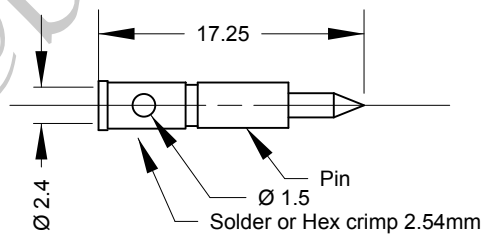

Note. Pin will snap into barrel with a positive lock.

Cable Preparation

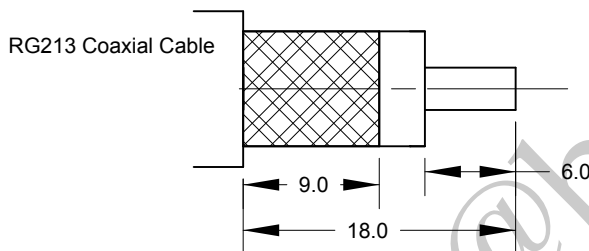

Note.  
Supplied with heat shrink for crimp ferrule

Crimping Details

Crimp Pin Hex 0.100" ( 2.54mm )  
Crimp Ferrule Hex 0.429" ( 10.9mm )

Crimp Tool Order Code:-

180454 or 180457

Cable Construction Specifications

RG213  
Inner Conductor 2.29mm  
Dielectric 7.25mm  
Outer Conductor 8.00mm  
Jacket 10.30mm

	PART	DESCRIPTION
1	Shell/Body	Brass, Nickel Plated
2	Insulator	Teflon
3	Pin Contact	Brass, Gold Plated
4	Ferrule	Brass, Nickel Plated

RG214 removed from drawing and given a new drawing 170012L

**BARENCO Ltd**

**Barenco Ltd**

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,  
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400  
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

DRAWN Name B. Gell

Dimensions: mm

Date 31/08/2018

Last Rev. 10/07/2020

SCALE 1 : 0.5

N plug crimp  
for RG213

SIZE  
**A4**

DWG NUMBER  
**170012**

REV -

SHEET 1 OF 1