



Cable : LMR240, LMR240UF, ANT240 & Equivalents

### Pin and insulator arrangement

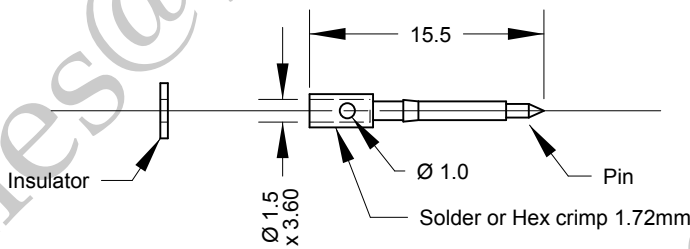

### Cable Preparation

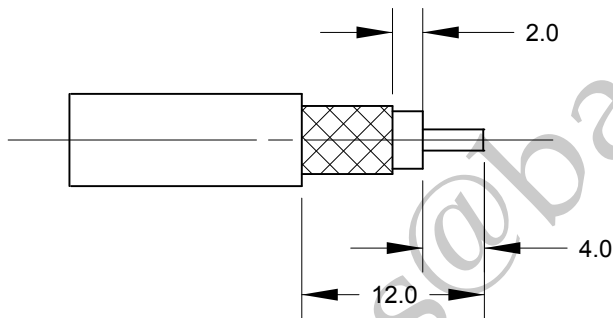

### Note.

Supplied with heat shrink for crimp ferrule

### Crimping Details

Crimp Pin Hex 0.068" ( 1.72mm )  
 Crimp Ferrule Hex 0.255" ( 6.48mm )

Crimp Tool Order Code:-

180456

General Cable Types: 4D-FB/H155/LMR240

### Cable Construction Specifications

	LMR240	LMR240UF	ANT240
Inner Conductor	1.42mm	1.42mm	1.42mm
Dielectric	3.81mm	3.81mm	3.81mm
Outer Conductor	3.94mm	3.94mm	3.94mm
Overall Braid	4.52mm	4.52mm	4.52mm
Jacket	6.10mm	6.10mm	6.10mm

	PART	DESCRIPTION
1	Shell/Body	Brass, Gold Plated
2	Insulator	Teflon
3	Pin Contact	Brass, Gold Plated
4	Ferrule	Brass, Gold Plated

## BARENCO Ltd

DRAWN Name	B. Gell	SMA plug crimp for LMR240	
Dimensions: mm			
Date	27/09/2019	SIZE	DWG NUMBER
Last Rev.		A4	170192
SCALE	1 : 0.5	REV	-
			SHEET 1 OF 1

## Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford, Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400  
 Email.Sales@barenco.co.uk. Web.www.barenco.co.uk