

Cable : RG174, RG316 & Equivalents

Note.  
Supplied with heatshrink for crimp ferrule


### Cable Preparation

Crimping Details

Crimp Ferrule Hex 0.213" ( 5.41mm )

Crimp Tool Order Code:-

180455, 180456 & 180458

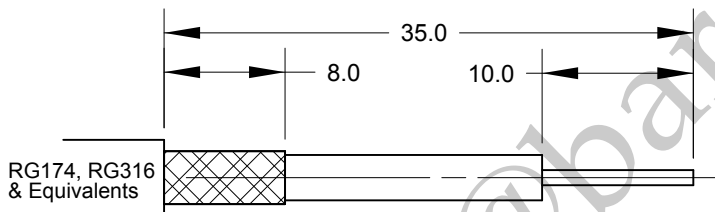

### Cable Construction Specifications

	RG174	RG316
Inner Conductor	0.48mm	0.53mm
Dielectric	1.52mm	1.53mm
Overall Braid	1.98mm	1.98mm
Jacket	2.54mm	2.50mm

CODE	DESCRIPTION	MATERIAL	QTY	FINISH
4	FERRULE	BRASS	1	NICKEL
3	SHELL/BODY	BRASS	1	NICKEL
2	INSULATOR	TEFLON	1	
1	PIN CONTACT	BRASS	1	NICKEL

## BARENCO Ltd

### Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,  
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400  
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

DRAWN Name B. Gell

Dimensions: mm

Date 31/12/2020

Last Rev.

SCALE 1 : 0.5

UHF plug crimp for  
RG174 & RG316

SIZE  
A4

DWG NUMBER  
170107S

REV -

SHEET 1 OF 1