

Cable: RG58CU, RG141 & Equivalents

Note.  
Supplied with heatshrink for crimp ferrule


Crimping Details

Crimp Ferrule Hex 0.213" ( 5.41mm )

Crimp Tool Order Code:-

180455, 180456 & 180458

Cable Preparation

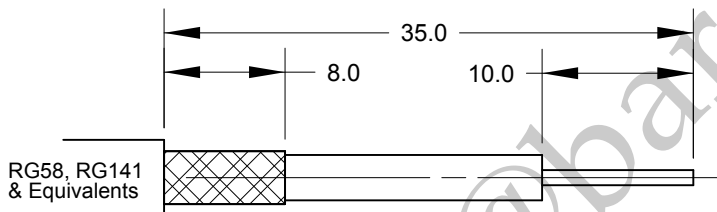

Note.

Tin stranded core before fitting.

Cable Construction Specifications

	RG58	RG141
Inner Conductor	0.90mm	0.94mm
Dielectric	2.95mm	2.95mm
Overall Braid	3.30mm	3.58mm
Jacket	4.95 mm	4.83mm

CODE	DESCRIPTION	MATERIAL	QTY	FINISH
4	FERRULE	BRASS	1	NICKEL
3	SHELL/BODY	BRASS	1	NICKEL
2	INSULATOR	TEFLON	1	
1	PIN CONTACT	BRASS	1	NICKEL

**BARENCO Ltd**

Last Revised - Pin finish changed to match body.

**Barenco Ltd**

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,  
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400  
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

DRAWN Name B. Gell		UHF plug crimp for RG58 & RG141	
Dimensions: mm		SIZE A4	DWG NUMBER 170107
Date 26/02/2020	Last Rev. 20/07/2020	REV -	SHEET 1 OF 1
SCALE 1 : 0.5			